

COMPOZITE ELITE DAVIT CRANE

Individually tested and certified at 125%



NEW!

OZCF1200DAV

Boom Weight
18lbs.

Crane weighs only 37 lbs.

Mast Weight
13lbs.

1200 lbs. Capacity (OZCF1200DAV)

Features


- Carbon fiber / High-strength aluminum construction
- Corrosion Resistant Finish
- Truly Portable Design
- One-Person Assembly (No Tools Needed)
- Manual Din rated CE winch with brake (Includes power drill adaptor)
- Synthetic Cable Assembly Available
- Headache Ball (OZHB10) available and sold separately
- Carrying case (OZRB1) available and sold separately

Load Ratings (lbs.)

*OZCF1200DAV based on 1/4" wire rope

	1st. Layer	Mid. Drum	Full Drum
Position 1 (0°)	500	500	500
Position 2 (+22.5°)	700	700	550
Position 3 (+45°)	1200	875	550

Introducing the world's most innovative davit cranes. Utilizing carbon fiber our CompOZite Elite Davit Cranes are pound for pound the lightest and strongest in the market.

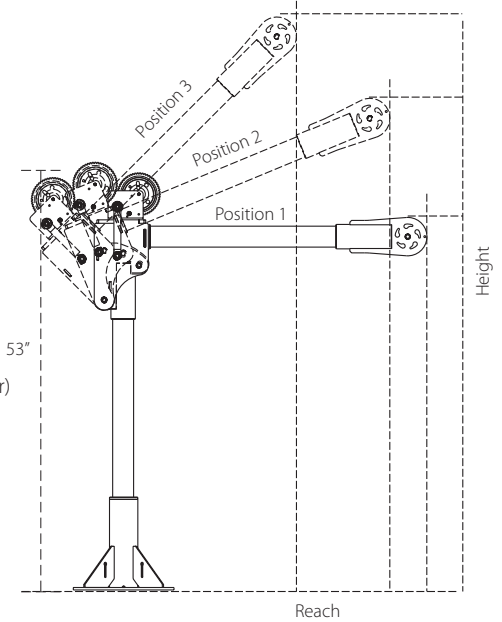

Position 1, Height 46", Reach 42"
Position 2, Height 62", Reach 36"
Position 3, Height 74", Reach 24"

*Dimensions are for reference only and subject to change without notice.

OZPED2 base shown
Bases and cable assemblies sold separately



Steel Wire Rope (For manual winch)

OZGAL.19-80B	3/16" x 80'	Galvanized cable assembly
OZSS.19-80B	3/16" x 80'	Stainless steel cable assembly
OZGAL.25-55B	1/4" x 55'	Galvanized cable assembly
OZSS.25-55B	1/4" x 55'	Stainless steel cable assembly


All cable assemblies come with swaged ball and swivel hook with latch. **Custom cable length available.**
3/16" - 80 ft max. length • 1/4" - 55ft max. length

Steel Wire Rope (For manual and power winch)


OZGAL.19-90	3/16" x 90'	Galvanized cable assembly
OZSS.19-90	3/16" x 90'	Stainless Steel cable assembly
OZGAL.25-45	1/4" x 45'	Galvanized cable assembly
OZSS.25-45	1/4" x 45'	Stainless Steel cable assembly

All cable assemblies come with swaged ball and swivel hook with latch. **Custom cable length available.**
3/16" - 90 ft max. length • 1/4" - 45ft max. length

Options for faster lowering and raising

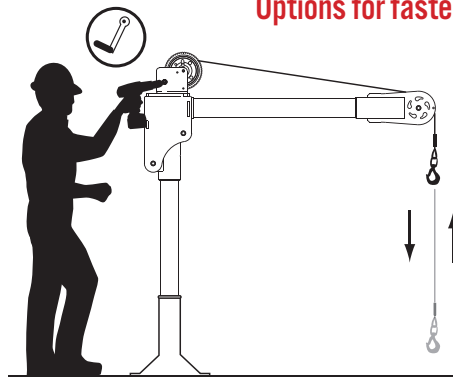

Detach winch handle for drill option.

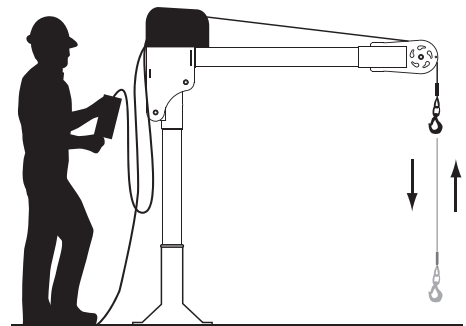

AC and DC power winches available.




DAVIT CRANE MOUNTING BASES (Sold Separately)

*Includes mounting template




COMPOSITE ELITE DAVIT CRANE - OZCF1200DAV

OZPED2

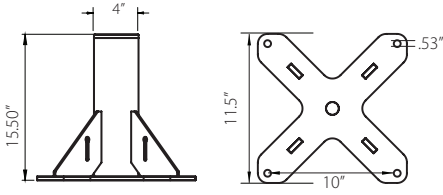


OZSOC2

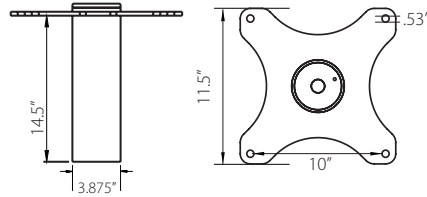

*Bases inside diameter 3.0"

OZWALL2

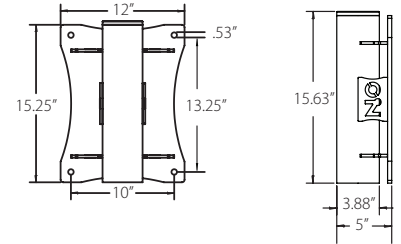

WARNING
CANCER AND REPRODUCTIVE HARM
Some products may contain chemicals known to the State of California to cause cancer, or birth defects or reproductive harm.
www.P65Warning.ca.gov



APPLICATION DATA SHEET | DAVIT CRANES

Date: _____

P.O. Box 845 Winona, MN 55987 • Tf: (800) 749-1064 • Ph: (507) 474-6250 • Fax: (507) 452-5217 • sales@ozliftingproducts.com

Company Name: _____ Contact Name: _____

Email Address: _____

Phone: _____ Fax: _____

Address: _____ City: _____ State: _____ Zip Code: _____

1. JOB DESCRIPTION:

2. WEIGHT OF LOAD:

3. HOW FAR IS THE LOAD MOVING?

4. REACH REQUIREMENTS:

5. WHAT CAPACITY DO YOU NEED AND WHAT REACH?

6. HEIGHT REQUIREMENTS:

7. WINCH REQUIREMENTS:


Hand 115 Volt AC 12 Volt DC

8. BASE REQUIREMENTS:

Pedestal Socket Wall Mount
 Base Extension

9. WHERE IS THE DAVIT CRANE BEING USED?

10. HOW DID YOU HEAR OF US?

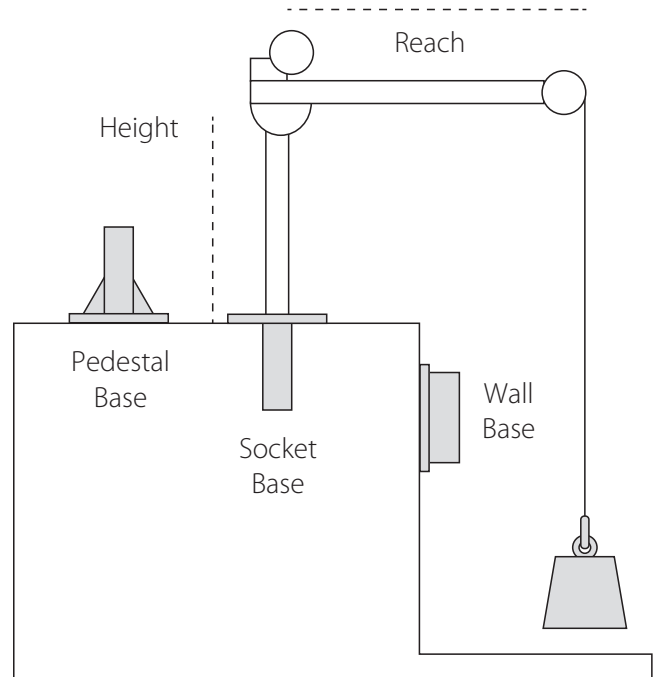

Purchaser is responsible for proper base installation. Consulting with a civil engineer or qualified professional is highly recommended.

Each crane is tested at 125%.
Test cert included. Cable and base sold separately.

OZ Lifting products are not for lifting up people or objects over people.

Load ratings may vary depending on position of boom, wire rope length and winch used.

